



2022 FULL LINE PRODUCT CATALOG







paslode.com

grkfasteners.com

tapcon.com



backeronrockon.com



ramset.com



teksscrews.com



redheadanchoring.com



easyanchors.com

Table of Contents

PASLODE®

PASLODE CORDLESS TOOLS	6-9
PASLODE PNUEMATIC TOOLS	10-17
PASLODE NAILS & ACCESSORIES & CODE REPORTS	18-23

GRK FASTENERS[™]

R4™ MULTI-PURPOSE FRAMING & DECKING SCREWS	26-27
RSS™ RUGGED STRUCTURAL SCREWS	28-29
DECK ELITE SCREWS	30-31
FIN/TRIM™ TRIM HEAD SCREWS	32-33
RT COMPOSITE™ TRIM HEAD SCREWS	34-35
PHEINOX™ STAINLESS STEEL SCREWS	36-37
- 305 Stainless	
- 316 Marine Grade Stainless	
LOW PROFILE CABINET™ SCREWS	38-39
TOP STAR™ SHIM SCREWS	40-41
CALIBURN™ CONCRETE SCREWS	42
MSS™ METAL SIDING SCREWS	43
STAR DRIVE BITS & ACCESSORIES	44

RED HEAD®

TRUBOLT® CONCRETE WEDGE ANCHORS	52-53
RED HEAD CONCRETE ANCHORS	54-55
RED HEAD A7+ ADHESIVE ANCHORS	56-57
HED HEAD AT HADREONE ANOTOHOUS	00 01
RAMSET®	
RAMSET P.A.T. TOOLS & ACCESSORIES	58-59
TEKS®	
TEKS METAL FASTENING SCREWS	60-63
BACKED ON® BOCK ON®	
BACKER-ON [®] , ROCK-ON [®]	
CEMENT BOARD SCREWS, CBS	64-65
E-Z ANCOR®	
E-Z ANCOR MULTI-USE ANCHORS	66-67
E-Z ANCOR MULT-USE ANCHORS	00-07
WARRANTIES	
LIABILITY AND WARRANTIES	68-69

TAPCON®

TAPCON CONCRETE SCREW ANCHORS	
TAPCON+ CONCRETE SCREW ANCHORS	

48-49 50-51



INNOVATION.

You could say we invented the nailer. And you would be right. Ever since we introduced the first pneumatic nailer, cordless framing nailer, and Positive Placement[®] metal connector system we've continued to improve our nailers and fasteners to be the best in the business.

QUALITY.

Paslode is committed to one thing. Excellence. We stand by our products above all else. Every Paslode product is engineered with expertise and battle-tested for realworld toughness and performance before it leaves our factory. Our decades of expertise in tool and nail manufacturing help us deliver products that stand up to the demands of the professionals who use them.

REPUTATION.

Nail by nail. Job by job. Day after day. We build our reputation the same way our customers do—one day at a time through hard work, reliability, and dedication. That's how Paslode became the standard by which other pneumatic and cordless fastening systems are measured. Our products are the go-to tools for professionals when it comes to framing, sheathing, trim and finish applications, fencing, floor and roof decking, siding, and insulation.



PATENTED CORDLESS TECHNOLOGY



BETTER THAN BATTERY ALONE

LIGHTER

The power of fuel means no heavy battery. Which makes our nailers the lightest on the market.

MORE RELIABLE

The simple combustion mechanism means fewer parts and less complicated wiring that can break.

MORE DURABLE

Simple self-maintenance/cleaning keeps Paslode cordless nailers running for up to 200,000 shots.





We're so confident in the quality of our cordless tools that we back each one with the industry's best guarantee.

If you have a problem with one of our cordless tools, you can send it to us and we'll fix it for free.

NO QUESTIONS.

NO HASSLES.

NO COSTS.

PASLODE[®] CORDLESS TOOLS



CORDLESS XP 30 DEGREE FRAMING NAILER

- **Power** Fuel + Battery System delivers consistent power to drive nails flush, even into engineered lumber.
- **Performance** Proven to withstand wear and tear like no other and drives 9,000 shots per battery charge to keep you productive all day.
- **Lightweight** At only 7.2 lbs, the lightest cordless framing nailer on the market, even lighter than pneumatics.

TOOL SPECIFICATIONS

Model	CFN325XP
Part #	906300
Weight	7.2 lbs w/battery
Dimensions	12"L x 4"W x 14.25"H
Nail Capacity	1 Strip (48 nails)
Nail Range	2" - 3 ¼"
Nail Diameter	.113 / .120 / .131
Nail Type	30° Paslode RounDrive® Full Head
Fuel Type	All-Season Fuel (part# 816008)
Nails per Fuel Cell	Approx. 1,200
Battery	Li-ion battery (part# 902654) and Charger (part# 902667)
Battery Life	9,000 nails per charge
Warranty	1-year full 5-year extended limited

Paslode®

PASLODE[®] CORDLESS TOOLS FINISH



CORDLESS 16GA ANGLED FINISH NAILER

- **Durability** Combustion technology that's proven to last for years of everyday use and exceed 150,000 shots.
- **Productivity** Narrow tapered body with high visibility no-mar tip and accurate depth control for a consistent, superior finish from shot 1 to shot 1,200.
- Lightweight Compact and lightweight. Best-in-class weight at 4.5 lbs for greater comfort, control, access and ease of use.

TOOL SPECIFICATIONS

1001	
Model	IM250A-Li2
Part #	916200
Weight	4.5 lbs w/battery
Dimensions	12"L x 3.5"W x 11.25"H
Nail Capacity	100 (2 Strips)
Nail Range	1 ¼" - 2 ½"
Nail Type	Angled 16GA - Galvanized
Fuel Type	Finish/Trim Fuel (part# 816007)
Nails per Fuel Cell	Approx. 1,200
Battery	Li-ion battery (part# 902654) and Charger (part #902667)
Battery Life	12,000 nails per charge
Warranty	1-year full 5-year extended limited



CORDLESS 16GA STRAIGHT FINISH NAILER

- **Durability** Combustion technology proven to exceed 150,000 shots
- Productivity Consistent power from shot 1 to 1,200.
- Lightweight The lightest cordless finish nailer on the market.

TOOL SPECIFICATIONS

Model	IM250S-Li
Part #	916000
Weight	4.6 lbs w/battery
Dimensions	10.5"L x 3.5"W x 11.75"H
Nail Capacity	100 (2 Strips)
Nail Range	1 ¼" - 2 ½"
Nail Type	Straight 16GA - Galvanized
Fuel Type	Finish/Trim Fuel (part# 816007)
Nails per Fuel Cell	Approx. 1,200
Battery	Li-ion battery (part# 902654) and Charger (part #902667)
Battery Life	12,000 nails per charge
Warranty	1-year full 5-year extended limited

ſ





CORDLESS 18GA STRAIGHT BRAD FINISH NAILER

- **Durability** Combustion technology proven to exceed 150,000 shots.
- **Productivity** Consistent power from shot 1 to 1,200. Plus angled magazine to fit into tight spaces.
- **Lightweight** The lightest cordless finish nailer on the market. At only 4.6 lbs. it gives pros greater comfort, control, and ease of use.

TOOL SPECIFICATIONS

Model	IM200Li
Part #	918000
Weight	4.6 lbs w/battery
Dimensions	11.25"L x 3.5"W x 12"H
Nail Capacity	100 (2 Strips)
Nail Range	%″ - 2″
Nail Type	18GA - Galvanized
Fuel Type	Finish/Trim Fuel (part# 816007)
Nails per Fuel Cell	Approx. 1,200
Battery	Li-ion battery (part# 902654) and Charger (part #902667)
Battery Life	12,000 nails per charge
Warranty	1-year full 5-year extended limited



Assembled in the U.S.A.

CORDLESS 18GA STRAIGHT BRAD FINISH NAILER 1-STRIP

- Maneuverable Able to fit in tight spaces where others can't.
- **Precise** Drives nails flush for high quality craftsmanship.
- Lightweight The lightest cordless nailer on the market makes for reduced fatigue and increased productivity.

TOOI	L SPECIFICATIONS
Model	IM200Li.2
Part #	918100 (Compact Mag)
Weight	4.25 lbs w/battery
Dimensions	11"L x 3.5"W x 11.5"H
Nail Capacity	50 (1 Strips)
Nail Range	<i>⁵</i> %″ - 2″
Nail Type	18GA - Galvanized
Fuel Type	Finish/Trim Fuel (part# 816007)
Nails per Fuel Cell	Approx. 1,200
Battery	Li-ion battery (part# 902654) and Charger (part #902667)
Battery Life	12,000 nails per charge
Warranty	1-year full 5-year extended limited

PASLODE[®] PNEUMATIC TOOLS FRAMING



30 DEGREE POWERMASTER PLUS™ FRAMING NAILER

- Durable Built to last and requires less maintenance.
- Reliable Consistently drives nails flush.
- Powerful Proven performance on the toughest jobsites.



30 DEGREE POWERFRAMER[™] FRAMING NAILER

• **Durable** - Reliable performance, minimum service.

TOOL SPECIFICATIONS

- Powerful It drives nails flush, even in LVL.
- Lightweight Works faster with less fatigue.

TOOL SPECIFICATIONS	
Model	F350S
Part #	501000
Weight	8.4 lbs
Dimensions	19.25"L x 6.5"W x 13.25"H
Nail Capacity	2 Strips (84 nails)
Nail Range	2" - 3 ½"
Nail Diameter	.113 / .120 / .131
Nail Type	30 Degree Paper Tape RounDrive®
Operating Pressure	80-120 psi (5.5 - 8.3 bar)
Warranty	1-year full 5-year extended limited

Model	PF350S
Part #	502000
Weight	7.5 lbs
Dimensions	18"L x 5"W x 13"H
Nail Capacity	2 Strips (84 nails)
Nail Range	2" - 3 ½"
Nail Diameter	.113 / .120 / .131
Nail Type	30 Degree Paper Tape RounDrive®
Operating Pressure	80-120 psi (5.5 - 8.3 bar)
Warranty	1-year full 5-year extended limited





Designed and Assembled in the U.S.A.

30 DEGREE COMPACT FRAMING NAILER

- Compact At only 12 inches long, fits easily into tight spaces.
- Lightweight Comfortable and maneuverable when working overhead.
- Productive By-pass follower provides quick re-load for increased productivity.

TOOL SPECIFICATIONS

Part # 513000 Weight 5.9 lbs Dimensions 12.3"L x 4.3"W x 12.9"H	Model	F325R
Dimensions 12.3"L x 4.3"W x 12.9"H	Part #	513000
	Weight	5.9 lbs
	Dimensions	12.3"L x 4.3"W x 12.9"H
Nail Capacity 1 strip (42 nails)	Nail Capacity	1 strip (42 nails)
Nail Range 2" - 3¼"	Nail Range	2" - 3¼"
Nail Diameter .113 / .120 / .131	Nail Diameter	.113 / .120 / .131
Nail Type30 Degree Paper TapeRounDrive®	Nail Type	
Operating 90-120 psi (6.2 - 8.3 bar) Pressure	1 0	90-120 psi (6.2 - 8.3 bar)
Warranty 1-year full 5-year extended limited	Warranty	5



Assembled in the U.S.A.

21 DEGREE ROUND HEAD FRAMING NAILER

- Powerful Drives nails flush even in the hardest wood.
- Durable Designed to be long lasting.
- **Dependable** Proven performance for tough jobsite work.

TOOL	SPECIFICATIONS
Model	F350-21
Part #	514000
Weight	8.1 lbs
Dimensions	21"L x 5"W x 13"H
Nail Capacity	2 strips (70 nails)
Nail Range	2 - 3½"
Nail Diameter	.113 / .120 / .131 / .148
Nail Type	21° Full Round Head No Debris Plastic Strip Nails
Operating Pressure	80-120 psi (5.5 - 8.3 bar)
Warranty	1-year full 5-year extended limited

PASLODE® PNEUMATIC TOOLS POSITIVE PLACEMENT® & tetraGRIPTM



21/2" POSITIVE PLACEMENT® METAL CONNECTOR NAILER

- Fast and accurate The innovative Positive Placement[®] probe tip guides nails for unmatched hole to hole speed.
- Versatile Drives both 1½" and 2½" Positive Placement[®] metal connector nails with shank diameters from .131 to 162.
- **Powerful** Powerful motor drives nails flush, even into engineered lumber.

TOOL SPECIFICATIONS

Model	F250S-PP
Part #	500855
Weight	8.5 lbs
Dimensions	19.5"L x 5"W x 13.88"H
Nail Capacity	2 Strips (44 nails)
Nail Range	11⁄2″ - 21⁄2″
Nail Diameter	.131 / .148 / .162
Nail Type	Positive Placement® Brite, Galvanized
Operating Pressure	80-120 psi (5.5 - 8.3 bar)
Warranty	1-year full 5-year extended limited



1½" POSITIVE PLACEMENT® METAL CONNECTOR NAILER

- Fast Positive Placement[®] probe for fastest hole to hole speed which provides widest angle of approach.
- Accurate Probing tip guides nails into hardware holes.
- **Powerful** Drives up to 1%" x .148 Metal Connector Nails flush even into LVL for all day performance.

TOOL	SPECIFICATIONS
Model	F150S-PP
Part #	515850
Weight	6.25 lbs
Dimensions	13"L x 3.7"W x 11.7"H
Nail Capacity	1 Strip (29 nails)
Nail Range	11⁄2″
Nail Diameter	.131 / .148
Nail Type	Positive Placement® Brite, Galvanized
Operating Pressure	90-120 psi (6.2 - 8.3 bar)
Warranty	1-year full 5-year extended limited





Designed and Assembled in the U.S.A.

tetraGRIP™ SUBFLOOR FASTENING SYSTEM

- Eliminates Nail Induced Floor Squeaks tetraGRIP fastener rotates as it drives to bond with the wood fibers. Use of glue between sheathing panels and floor framing is not required.
- Reduces Builder Warranty Costs Fewer call backs & repair costs
- Reduces Framer Repair Costs More efficient than screws and saves the framing company time and labor costs

TOOL	TOOL SPECIFICATIONS				
Model	PF237	PF237C			
Part #	50300	0			
Weight	8.3 lbs	5			
Dimensions	12.25	"L x 5"	W x 13.5"	Н	
Nail Capacity	1 Coil	(120 r	nails)		
Nail Range	2 ¾″				
Nail Diameter	.113				
Nail Type	tetraGRIP™ 0 Degree Brite Coil Subfloor Fastener			oil	
Operating Pressure	90-120 psi (6.2 - 8.3 bar)				
Warranty	1-yea 5-yea		nded limit	ed	
			Fastanar-(Coils/	Factor
Part # Length Diameter S	hank	Finish	Fasteners/ Coil	Coils/ Carton	Fasteners Carton

Brite

Barbed

650605 2 ³/₈"

.113

120

18

2,160



Assembled in the U.S.A.

tetraGRIP™ SIDING COIL NAILER SYSTEM

- Fast Drives as fast as a nail and has the holding power of a screw. Fast, secure installation without fastening to studs.
- Maneuverability The tetraGRIP[™] Coil Siding Nailer weighs in at 4.9 lbs and has a compact design for maximum maneuverability.

		TC	OL	S	PECIFICA	TIONS			
		Mod	lel	TG100CSN					
		Part	: #	51	515400				
	,	Weig	ht	4.	9 lbs				
	Dime	ensio	ns	12	2.25"L x 6"V	V x 11.5"H	ł		
	Nail Ca	apaci	ity	1	coil (120 na	ails)			
	Nai	l Ran	ge	11	/8″				
Ν	lail Di	amet	er	.117					
	Nail Type			tetraGRIP™ 0 Degree Stainless Steel Coil Siding Fastener					
Operating Pressure			90-120 psi (6.2 - 8.3 bar)						
Warranty		ity	1-year full 5-year extended limited						
					10000				
Part #	Length		Shar	ık	Finish	Fasteners/ Coil	Coils/ Carton	Fastene Carton	ers/
650867	1 1/8"	.117	Barb	ed	304 Stainless	120	30	3,600	

PASLODE® PNEUMATIC TOOLS FINISH



16GA STRAIGHT FINISH NAILER

- Lightweight Optimal balance, maximum comfort, and reduced fatigue for increased productivity.
- **Consistent** Each time the trigger is pulled, the nail drives flush into the applications.
- **Durable** Oil-free design allows for long term, maintenance free operation which reduced associated costs.

TOOL SPECIFICATIONS

Model	T250S-F16P
Part #	515500
Weight	3.9 lbs
Dimensions	12.3"L x 2.9"W x 11.6"H
Nail Capacity	2 Strips (100 nails)
Nail Range	1″ - 2½″
Nail Diameter	N/A
Nail Type	16GA Galvanized Straight
Operating Pressure	80-120 psi (5.5 - 8.3 bar)
Warranty	1-year full 5-year extended limited



18GA STRAIGHT BRAD FINISH NAILER

- **Durability** Rugged lightweight body withstands high impact even if dropped.
- **Reliability** Professional-grade design offers consistent drive to finish the job right the first time.
- **Precision** Smaller nose provides clear line of sight for accurate nail placement.

TOOL SPECIFICATIONS

Model	T200-F18P
Part #	515600
Weight	2.9 lbs
Dimensions	10.04"L x 2.56"W x 10.63"H
Nail Capacity	2 Strips (100 nails)
Nail Range	<i>⁵</i> %″ - 2″
Magazine Angle	Straight Collation
Nail Type	18GA Galvanized
Operating Pressure	80-120 psi (5.5 - 8.3 bar)
Warranty	1-year full 5-year extended limited





PASLODE® PNEUMATIC TOOLS STAPLERS



16GA STANDARD CROWN STAPLER

- Speed Up to 10 staples per second.
- Power Drives flush in all materials.
- **Durable** Heavy duty all-metal magazine design.



16GA WIDE CROWN STAPLER

- Speed Up to 10 staples per second.
- **Power** Drives flush in all materials.
- Durable Heavy duty all-metal magazine design.

TOOL SPECIFICATIONS		
Model	SCS200	
Part #	515700	
Weight	5.6 lbs	
Dimensions	15.1"L x 3.4"W x 11.7"H	
Magazine Capacity	150 staples	
Staple Range	³ ⁄4″ - 2"	
Staple Type	½" Crown 16GA Galvanized	
Operating Pressure	80-120 psi (5.5 - 8.3 bar)	
Warranty	1-year full 5-year extended limited	

τοοι	TOOL SPECIFICATIONS		
Model	WCS200		
Part #	515800		
Weight	5.9 lbs		
Dimensions	15.1"L x 3.4"W x 11.7"H		
Magazine Capacity	150 staples		
Staple Range	³ ⁄4″ - 2"		
Staple Type	¹⁵ / ₁₆ " Crown 16GA Galvanized		
Operating Pressure	80-120 psi (5.5 - 8.3 bar)		
Warranty	1-year full 5-year extended limited		





18GA CAPSTAPLER

- Convenient Staples and caps in one easy step.
- **Consistent Drive Performance** Saves time on roofing felt and housewrap.
- **Easy Loading** Open design makes staple and cap reloading a snap.

TOOL SPECIFICATIONS			
CS150			
502575			
4.8 lbs			
15.5"L x 4"W x 10.5"H			
90 Staples			
1 Spool (240 Caps)			
1" - 1½ "			
18GA ¾" Narrow Crown			
70-110 psi (4.8 - 7.6 bar)			
1-year full 5-year extended limited			

PASLODE® PNEUMATIC TOOLS & ACCESSORIES

PASLODE® FRAMING FUEL, NAILS & FUEL+ NAIL PACKS

All-Season Framing Fuel

FUEL

816008

PART # PRODUCT

DESCRIPTION

Drives 1,200 nails,

27 - month shelf life

ASSOCIATED PRODUCT(S)

906300 - CFN325XP Cordless XP Framing Nailer 905600 - CF325XP Cordless Framing Nailer 902600 - CF325Li Cordless Framing Nailer 900420 - IMCT Cordless Framing Nailer (with valve)

FUEL + NAIL PACKS

Power Boost Coating





CORDLESS FRAMING FUEL + NAIL PACKS					
Part #	Length	Diameter	Shank	Finish	#/Box
650564	2"	.113	Ring	HDG	1,000
650526	2 ¾"	.113	Ring	HDG	1,000
650522	2 ¾"	.113	Smooth	Brite	1,000
650523	2 ¾"	.113	Ring	Brite	1,000
650565	2 ¾"	.113	Ring	Brite	3,000
650527	3"	.120	Ring	*HDG	1,000
650524	3"	.120	Smooth	*Brite	1,000
650631	3"	.120	Smooth	*Brite	3,000
650525	3"	.131	Smooth	*Brite	1,000
650566	3"	.131	Smooth	*Brite	3,000
650535	3 ¼"	.131	Smooth	*Brite	1,000
650630	3 ¼"	.131	Smooth	*Brite	3,000
650615	3 ¼"	.131	Smooth	*HDG	900

Note: 1,000 count cartons contain 1 fuel cell. 3,000 count cartons contain 3 fuel cells



 \sim

FRAMING NAILS

[
Ring Shank	
n	~

Smooth Shank

30° ROUNDRIVE® FRAMING NAILS						
Part #	Length	Diameter	Shank	Finish	#/Box	
650272	2"	.113	Smooth	Brite	5,500	
650273	2"	.113	Ring	Brite	5,500	
405253	2 1⁄2"	.131	Smooth	Brite	3,000	
650237	2 ¾"	.113	Smooth	Brite	5,000	
650238	2 %"	.113	Ring	Brite	5,000	
650836	3"	.120	Smooth	Brite	2,500	
650830	3"	.131	Smooth	Brite	2,500	
650839	3 ¼"	.131	Smooth	Brite	2,500	
650381	2"	.113	Ring	HDG	2,000	
650382	2 ¾"	.113	Smooth	HDG	2,000	
650383	2 ¾"	.113	Ring	HDG	2,000	
650384	3"	.120	Smooth	HDG	2,000	
650385	3"	.120	Ring	HDG	2,000	
650386	3"	.131	Smooth	HDG	2,000	
650387	3"	.131	Ring	HDG	2,000	
650388	3 ¼"	.131	Smooth	HDG	2,000	
650474	3 ¼"	.131	Ring	HDG	2,000	
650476	3 1⁄2"	.131	Smooth	HDG	2,000	

For use with 906300, 501000, 502000 and 513000

Ring	Shank				
				*	\Rightarrow
Smoo	th Shank				
21° FULL ROUND HEAD NO DEBRIS PLASTIC STRIP NAILS					
	1	D ¹	Chara I.	Et al ala	# (D

Part #	Length	Diameter	Shank	Finish	#/Box
211322	2 %"	.113	Smooth	Brite	2,000
211332	2 ¾"	.113	Ring	Brite	2,000
213142	2 1⁄2"	.131	Smooth	Brite	2,000
212062	3"	.120	Smooth	Brite	2,000
213162	3"	.131	Smooth	Brite	2,000
213182	3 ¼"	.131	Smooth	Brite	2,000

For use with 514000

Ring Shank

ľ

Smooth Shank

D-HEAD FRAMING NAILS							
Part #	Length	Diameter	Shank	Finish	#/Box		
401548	2 ¼"	.113	Smooth	Brite (Heat Treated)	4,000		
097969	2 ¾"	.120	Smooth	Brite	3,500		
097970	2 ¾"	.120	Ring	Brite	3,500		
097973	3"	.120	Ring	Brite	3,000		
097975	3"	.131	Ring	Brite	2,500		
097978	3 ¼"	.131	Ring	Brite	2,500		
097987	3 ½"	.131	Smooth	Brite	2,500		
For use with	For use with 906300, 501000, 502000 and 513000						



Positive Placement® Nail heads marked for easy identification

POSITIVE PLACEMENT® METAL CONNECTOR NAILS					
Part #	Length	Dia.	Finish	#/Box	
650645 (4 boxes of 1,0	1 ½" 100 count/mas	.131 ter carton)	Brite, Heat Treated	4,000	
650025	1 1⁄2"	.131	Brite, Heat Treated	3,500	
650646 (3 boxes of 1,0	1 ½" 000 count/mas	.148 ter carton)	Brite, Heat Treated	3,500	
650026	1 1⁄2"	.148	Brite, Heat Treated	3,000	
650199	2 1⁄2"	.131	Brite, Heat Treated	2,500	
650027	2 1⁄2"	.148	Brite, Heat Treated	2,500	
650028	2 1⁄2"	.162	Brite, Heat Treated	4,000	
650197	1 1⁄2"	.131	Mech. Galv, Heat Treated	3,500	
650481 (4 boxes of 50	1 ½" 0 count/maste	.148 er carton)	Mech. Galv, Heat Treated	3,500	
650014	1 1⁄2"	.148	Mech. Galv, Heat Treated	3,000	
650106	2 1⁄2"	.148	Mech. Galv, Heat Treated	2,500	
650198	2 1⁄2"	.162	Mech. Galv, Heat Treated	2,500	

For use with 515850 (1½") and 500855 (1½" + 2½")

PASLODE[®] FINISH & EXTERIOR FUEL, NAILS, & STAPLES

FINISH FUEL



	-		
PART #	PRODUCT	DESCRIPTION	ASSOCIATED PRODUCT(S)
816007	Finish/Trim Fuel (2 pack)	Drives 1,200 nails, 21 - month shelf life	916200 - Cordless 16 Ga Angled Li-ion Finish Nailer 902400 - Cordless 16 Ga Angled Li-ion Finish Nailer 916000 - Cordless 16 Ga Straight Li-ion Finish Nailer 918000 - Cordless 18 Ga Li-ion Brad Nailer 918100 - Cordless 18 Ga Straight Li-ion Brad Nailer (compact mag) 900078NT - Cordless 16 Ga Stapler (with below adapter)
902550	Yellow Fuel Adapter		900078NT - Cordless 16 Ga Stapler

902550

Yellow Fuel Adapte

FINISH NAILS



16GA ANGLED FINISH/TRIM NAILS						
Part #	Length	Gauge	Finish	Qty.		
650230	1 ¼"	16 GA Angled	Galvanized	2,000		
650231	1 1⁄2"	16 GA Angled	Galvanized	2,000		
650046	1 ¾"	16 GA Angled	Galvanized	2,000		
650047	2"	16 GA Angled	Galvanized	2,000		
650232	2 1⁄2"	16 GA Angled	Galvanized	2,000		

6 boxes per carton, 12,000 Qty For use with 902400, 900600 and 500910



18GA BRAD NAILS						
Part #	Length	Gauge	Finish	Qty.		
650212	1"	18 GA Brad	Galvanized	2,000		
650213	1¼"	18 GA Brad	Galvanized	2,000		
650214	1 ½"	18 GA Brad	Galvanized	2,000		
650215	2"	18 GA Brad	Galvanized	2,000		

6 boxes per carton, 12,000 Qty For use with 918000, 918100, 515600 and 500959



16GA STRAIGHT FINISH/TRIM NAILS

Part #	Length	Gauge	Finish	Qty.
650282	1¼"	16 GA Straight	Galvanized	2,000
650283	1½"	16 GA Straight	Galvanized	2,000
650284	1 ¾"	16 GA Straight	Galvanized	2,000
650285	2"	16 GA Straight	Galvanized	2,000
650287	2 1⁄2"	16 GA Straight	Galvanized	2,000

6 boxes per carton, 12,000 Qty For use with 916000, 515500 and 501680



STAPLES



16GA STANDARD (1/2") CROWN STAPLES						
Part #	Length	Wire	Crown	Finish	Qty.	
OT5240	3⁄4"	16GA	1⁄2"	Galvanized	21,000	
OT5242	1"	16GA	1⁄2"	Galvanized	16,500	
OT5243	1 1⁄8"	16GA	1⁄2"	Galvanized	15,000	
OT5238	1 ¼"	16GA	1⁄2"	Galvanized	13,500	
OT2695	1 ½"	16GA	1⁄2"	Galvanized	10,500	
OT2250	1 ¾"	16GA	1⁄2"	Galvanized	9,000	
OT2258	2"	16GA	1⁄2"	Galvanized	7,500	

For use with 515700, 900078NT, and 501230



16GA WIDE (15/16") CROWN STAPLES						
Part #	Length	Wire	Crown	Finish	Qty.	
404068	3⁄4"	16GA	¹⁵ / ₁₆ "	Galvanized	9,000	
404069	7⁄8"	16GA	¹⁵ / ₁₆ "	Galvanized	9,000	
404070	1"	16GA	¹⁵ / ₁₆ "	Galvanized	9,000	
404071	1 ¼"	16GA	¹⁵ / ₁₆ "	Galvanized	9,000	
OT2855	1 1⁄2"	16GA	¹⁵ / ₁₆ "	Galvanized	10,500	
650098	1 ¾"	16GA	¹⁵ / ₁₆ "	Galvanized	9,000	
403471	2"	16GA	¹⁵ / ₁₆ "	Galvanized	7,500	

For use with 515800, and 501265



	FasCaps PLASTIC CAPS AND STAPLES											
Part # Length Wire Crown Finish Qty.												
650592	1"	18GA	3⁄8"	Galvanized	10,080							
650597	1 1⁄2"	18GA	3⁄8"	Galvanized	8,640							

FasCaps are 6 inner boxes per carton For use with 502575

PASLODE® ACCESSORIES & CODE REPORTS CORDLESS & PNEUMATIC

CORDLESS BATTERIES

PART #	PRODUCT	DESCRIPTION	ASSOCIATED PRODUCT(S)		
902654	Paslode Li-ion Battery	Framing: 9,000 nails per charge Finish: 12,000 nails per charge Full charge in 90 minutes	906300 - CFN325XP Cordless XP Framing Nailer 905600 - CF325XP Cordless Framing Nailer 916200 - Cordless 16 Ga Angled Li-ion Finish Nailer 902400 - Cordless 16 Ga Angled Li-ion Finish Nailer 916000 - Cordless 16 Ga Straight Li-ion Finish Nailer 918000 - Cordless 18 Ga Li-ion Brad Nailer		
902667	Paslode Li-ion Battery Charger	2x faster charge time, 2 minute quick charge drives up to 200 nails	902654 - Paslode Li-ion Battery		
219413	Auto Adapter Kit	Charger base and auto adapter cord	All Paslode Li-ion Tools		
402500	Paslode Ni-Cd Stick Battery	2 hour charge; 4,000 staples per charge	900078NT - Cordless 16 Ga Stapler		
900200	Paslode Ni-Cd Stick Battery Charger	2 hour charge time	404717 - Oval Battery 402500 - Stick Battery		
900507	Auto Adapter Charger	Use with 900200 battery charger	900200 - Paslode Battery Charger		
404717	Ni-Cd Battery	Drives up to 4,000 nails per charge; Recharges within 2 hours	902200 - CF325 Cordless Framing Nailer 900420 - IMCT Cordless Framing Nailer 900600 - IM250A Cordless 16 Ga Angled Finish Nailer 901000 - Cordless 18 Ga Brad Nailer 902000 - Cordless 16 Ga Straight Finish Nailer		

CORDLESS ACCESSORIES

PART #	PRODUCT	DESCRIPTION	ASSOCIATED PRODUCT(S)
219377	Cordless Li-ion Framing Tune-up Kit		905600 - CF325XP Cordless Framing Nailer 906300 - CFN325XP Cordless XP Framing Nailer 902600 - CF325Li Cordless Framing Nailer
219409	Cordless Li-ion Finish/Trim Tune-up Kit		902400 - IM250A-Li 16 Ga Angled Li-ion Finish Nailer 916000 - IM250S-Li 16 Ga Straight Li-ion Finish Nailer 918000 - IM200Li 18 Ga Straight Li-ion Brad Nailer
219348	Cordless Tool Cleaner	12oz. Bottle	All Paslode Cordless Tools
401482	Cordless Nailer Lubrication Oil	4oz. Bottle	All Paslode fuel-powered cordless nailers
902473	No-Mar Tips	3-pack - Angled	902400 - Cordless 16 Ga Angled Finish Nailer 916200 - Cordless 16 Ga Angled Li-ion Finish Nailer
219236	No-Mar Tips	3-pack - Straight	916000 - Cordless 16 Ga Straight Finish Nailer
901252 E 22	No-Mar Work Contact Element	1-pack - Framing	905600 - CF325XP Cordless Framing Nailer 906300 - CFN325XP Cordless Framing Nailer 902600 - CF325Li Cordless Framing Nailer 902200 - CF325 Cordless Framing Nailer



PNEUMATIC ACCESSORIES

PART #	PRODUCT	DESCRIPTION	ASSOCIATED PRODUCT(S)
403720	Pneumatic Nailer Lubrication Oil	12 oz. Bottle	All Paslode pneumatic nailers
219228	No-Mar Nose	Protects wood surfaces	501000 - F350-S PowerMaster Plus

CODE REPORTS

LISTED MANUFACTURER	PRODUCT	ESR NUMBER	QR CODE
ISANTA	Power-Driven Staples and Nails	ESR-1539	
Paslode, An Illinois Tool Works Company	Paslode Positive Placement Nails and Duo-Fast Connector Framing Nails	ESR-2126	
Paslode, An Illinois Tool Works Company	Paslode tetraGRIP nails	ESR-3071	
Paslode, An Illinois Tool Works Company	Paslode Nails	ESR-3072	
Paslode, An Illinois Tool Works Company	Paslode and Duo-Fast Galvanized Nails	ESR-3326	



GREATNESS AT EVERY TURN

GRK Fasteners offers a wide selection of fasteners that includes multipurpose, structural, deck, trim, cabinet, composite and stainless screws, but they all have one thing in common-quality.

GRK Fasteners allows users to complete jobs with more productivity. Our patented W-Cut[™] Threadform feature reduces installation torque and allows fast driving and ease of install, the recessed Star Drive eliminates recess stripping for improved productivity, and the Zip-Tip[™] feature eliminates the need for pre-drilling and allows one-step installation. GRK's feature-rich screws drive jobsite productivity and allow users to keep moving from one job to the next.

GRK fasteners are corrosion resistant, approved for use in treated lumber and designed for both interior and exterior use.





R4TM MULTI-PURPOSE FRAMING & DECKING SCREWS

FASTER DRIVE FOR IMPROVED PRODUCTIVITY

GRK's R4[™] Multi-purpose Screw is a versatile, code-approved fastener for hundreds of applications. Its feature-rich design provides a fast and reliable connection every time.


- Fast Bite Tip: Provides a fast start for one-step installation
- **Zip-Tip™:** Eliminates pre-drilling
- W-Cut[™]: Low torque, faster drive
- **Precision Fit:** Reduces wobble between R4 screws and GRK bits for improved productivity¹
- **CEE Thread™:** Enlarges hole to reduce splitting²
- **Star Drive Recess:** Zero stripping, with 6 points of contact
- **Underhead Cutting Teeth:** Cuts wood fiber & provides flush seating
- **GRK Head Markings:** Easy identification of genuine GRK screws
- Climatek[™] Coating: ICC-ES AC257 code approved for use in treated lumber³
- **Code Approved:** For structural applications (see ESR-3201)⁴
- Some sizes also available in PHEINOX[™] 305 and 316 grade Stainless Steel• For interior / exterior use
- 1. Precision Fit included on #9 and #10 sizes only
- 2. CEE Thread included on fasteners 2" and longer
- 3. For cedar, redwood and other naturally protected woods,
 - GRK Pheinox™ 305 and 316 stainless steel is recommended
- 4. ICC Code Approval for #9, #10, and #12 sizes only







	U.S (Std.) Size (Dia. x Length)	Bulk Part No.	Bulk Box Qty.	Contractor Packs (XL buckets) Part No.	Contractor Packs (XL buckets) Qty.	Pro- Pak Part No.	Pro-Pak Pail Qty.	Handy-Pak Part No.	Handy-Pak MC Qty./ Screw Qty. (per EA)
T-15	#6 x 1-1/4"	00051	13,000						
T-15	#8 x 1-1/4" #8 x 1-1/2" #8 x 1-3/4" #8 x 2" #8 x 2-1/2"	00073 00077 00079	6,500 4,500 3,500			01069 01073 01075 01077 01079	1,300 1,000 925 850 650	96080 96085 02075 02077 02079	4 / 110 4 / 110 20 / 100 20 / 100 20 / 100
T-25	#9 x 1-1/4" #9 x 1-1/2" #9 x 1-3/4" #9 x 2" #9 x 2-1/2" #9 x 2-3/4" #9 x 3-1/8"	00091 00095 00097 00099 00101 00103 00105	8,000 5,200 4,500 3,700 2,900 2,000 1,900	120990 121010 121050	990 900 720	01095 01099 01101 01103 01105	820 690 575 480 425	02095 103099 103101 02103 103105	20 / 100 4 / 110 4 / 100 10 / 100 4 / 80
T-25	#10 x 2" #10 x 2-1/2" #10 x 2-3/4" #10 x 3-1/8" #10 x 3-1/2" #10 x 4" #10 x 4-3/4"	00131 00133 00135 00137 00139 00141 00143	3,200 2,500 2,000 1,500 1,200 1,000 800	95200 121410	630 450	01133 01137 01139 01141 01143	470 350 300 270 230	103133 103137 02139 103141 02143	4 / 80 4 / 70 10 / 50 4 / 50 10 / 50
T-25	#12/14 x 5-5/8" #12/14 x 6-3/8" #12/14 x 8"	00173 00177 00181	600 1,000 500					96089 02177 02181	4 / 50 9 / 50 9 / 50

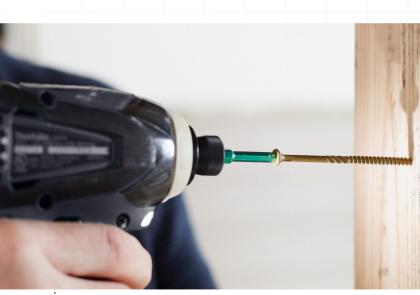

APPLICATIONS:

- Multi-Purpose Framing
- Interior and Exterior Remodeling
- Porches and Patios
- Fencing
- Exterior Structures

Pro-Paks need to be ordered in multiples of two
2" bit included in Pro-Paks. 1" bit with Handy-Paks

RSS™ STRUCTURAL RUGGED STRUCTURAL SCREWS

EASY TO INSTALL LAG ALTERNATIVE

GRK's RSS[™] Rugged Structural Screw is a structural fastener designed for ease of installation and the strongest of connections. RSS fasteners drive into most woods without the need for pre-drilling. The specially engineered design results in a low-effort installation, especially compared to conventional lag screws.

- Fast Bite Tip: Provides a fast start for one-step installation
- Zip-Tip[™]: Eliminates pre-drilling¹
- W-Cut[™]: Low torque, faster drive
- **Precision Fit:** Reduces wobble between RSS screws and GRK bits for improved productivity²
- Integrated Washer Head: Maximum clamping force
- Star Drive Recess: Zero stripping, with 6 points of contact
- **GRK Head Markings:** Easy identification of genuine GRK screws
- CEE Thread[™]: Enlarges hole to reduce splitting³
- Climatek[™] Coating: ICC-ES AC257 code approved for use in treated lumber³
- **Code Approved:** For structural applications (see ESR-2442)⁴
- Some sizes also available in PHEINOX[™] 305 and 316 grade Stainless Steel• For interior / exterior use

- 2. Precision Fit included on 5/16" sizes only
- 3. CEE Thread included on fasteners 3-1/8" and longer
- 4. For cedar, redwood and other naturally protected woods,
 - GRK Pheinox[™] 305 and 316 stainless steel is recommended
- 5. ICC Code Approval for 1/4", 5/16", and 3/8" sizes only

FSR_2442

AC257 Treated

Lumber Approved


^{1.} Zip-Tip included on fasteners 2-1/2" and longer



	U.S (Std.) Size (Dia. x Length)	Bulk Part No.	Bulk Box Qty.	Pro- Pak Part No.	Pro- Pak Pail Qty.	Handy- Pak Part No.	Handy-Pak MC Qty./ Screw Qty. (per EA)	RSS™ Mini Handy-Pak Part No.	RSS™ Mini Handy-Pak MC Qty./ Screw Qty. (per EA)	RSS™ Individually Tagged Pt. No.(Qty./ Ctn.)
T-25	#10 x 2-1/2" #10 x 3-1/8"	10133 10137	1,000 800	11137	236	12133 12137	10 / 50 10 / 50			
T-25	1/4" x 1-1/2" 1/4" x 2" 1/4" x 2-1/2" 1/4" x 3-1/8"	10151 10155 10157 10161	1,000 800 700 500			12151 12155 12161	20 / 50 10 / 50 10 / 50			
T-30	5/16" x 2-1/2" 5/16" x 2-3/4" 5/16" x 3-1/8" 5/16" x 3-1/2" 5/16" x 4" 5/16" x 5-1/8" 5/16" x 6"	10217 10219 10221 10223 10225 10231 10235	600 500 500 500 400 300 300			12217 12219 12221 12223 12225 12231 12235	9 / 100 2 / 100 2 / 100 2 / 100 2 / 100 9 / 50 9 / 50	14221 14225 14231 14235	10 / 25 10 / 25 10 / 25 10 / 25	96001 (1/50) 96005 (1/50) 96010 (1/50) 96015 (1/40)
T-40	3/8" x 3-1/8" 3/8" x 4" 3/8" x 6" 3/8" x 7-1/4" 3/8" x 8" 3/8" x 10" 3/8" x 12" 3/8" x 14-1/8" 3/8" x 16"	10273 10275 10281 10285 10287 10293 10299 10311	400 400 300 200 300 300 300 300			12275 12281 12285 12287 12293 12299 12307 12311	9 / 50 2 / 50			96020 (1/25) 96025 (1/25) 96030 (1/20)

RSS[™] JTS - JOIST AND TRUSS SCREW

	1/4″ x 5"				93735	9 / 50	
	-					5,00	
	1/4" x 6-3/4"	91743	300		93743	9 / 50	
T-25							

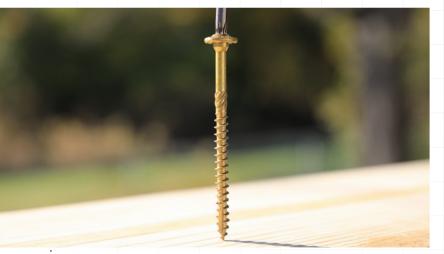

APPLICATIONS:

- Structural Decking
- Heavy Duty Framing
- LVL Fastening
- Ledger Boards
- Multi-ply
- Interior and Exterior Remodeling

• Pro-Paks need to be ordered in multiples of two • 2" bit included in Pro-Paks. 1" bit with Handy-Paks

DECK ELITE DECKING SCREWS

SPEED. QUALITY. ELEVATED CRAFTSMANSHIP

GRK's Deck Elite screws are designed for use in wood deck boards and provide a quick drive and clean finish. Deck Elite screws start immediately in wood with a smooth, fast drive to increase productivity on the job and the tan color of the screw provides an ideal finish.

- Tan Color: Provides an ideal finish
- Fast Bite Tip: Provides a fast start for one-step installation
- Zip-Tip[™]: Eliminates pre-drilling
- W-Cut[™]: Low torque, faster drive
- CEE Thread[™]: Enlarges hole to reduce splitting¹
- Star Drive Recess: Zero stripping, with 6 points of contact
- **GRK Head Markings:** Easy identification of genuine GRK screws
- Corrosion Resistant Coating: Resists rust and keeps decks looking new
- For use in wood deck boards, fencing, and deck rails, including pressure treated lumber²
- For interior / exterior use

1. CEE Thread included on fasteners 2" and longer

2. For cedar, redwood and other naturally protected woods, GRK Pheinox[™] 305 and 316 stainless steel is recommended



	U.S (Std.) Size	Contractor Packs	Contractor Packs	Pro-Pak	Pro-Pak
	(Dia. x Length)	(XL buckets) Part No.	(XL buckets) Qty.	Part No.	Pail Qty.
T-15	#8 x 2	40803	1,080	10803	540
T-25	#9 x 1-5/8"	49159	1,080	19159	540
	#9 x 2-1/2"	49212	800	19212	400
	#9 x 3"	40903	700	10903	350

• Contractor Packs and Pro-Paks need to be ordered in multiples of two • 2" bit included in Pro-Paks. 1" bit with Contractor Packs



APPLICATIONS:


- Deck Boards
- Fencing
- Deck Rails

FIN/TRIM[™] FINISHING TRIM HEAD SCREWS

PROFESSIONAL FINISH, PROFESSIONAL LOOK

GRK's Fin/Trim™ screws are an excellent choice for most fine carpentry applications, as well as window extension jambs, joining cabinets and more. A combination of the smallest screw head available and code approved structural performance means the most secure, concealed fastening in the industry.

- Trim Head: Clean, finished look
- Star Drive Recess: Zero stripping, with 6 points of contact
- W-Cut[™]: Low torque, faster drive
- Zip-Tip™: Eliminates pre-drilling
- Climatek[™] Coating: ICC-ES AC257 code approved for use in treated lumber¹
- **Code Approved:** For structural applications (see ESR-3201)
- Some sizes also available in PHEINOX[™] 305 and 316 grade Stainless Steel
 For interior / exterior use



ES







	U.S (Std.) Size (Dia. x Length)	Bulk Part No.	Bulk Box Qty.	Pro-Pak Part No.	Pro-Pak Pail Qty.	Handy-Pak Part No.	Handy-Pak MC Qty./Screw Qty. (per EA)
T-10	#8 x 1-1/4" #8 x 1-1/2" #8 x 2" #8 x 2-1/2" #8 x 2-3/4" #8 x 3-1/8"	15724 15728 15730 15734	6,500 4,500 3,500 2,500	116724 116728 16730 115734	600 510 605 300	96055 119724 119728 119730 17732 119734	6 / 100 6 / 100 6 / 100 6 / 100 20 / 100 6 / 100
T-15	#9 x 4" #9 x 5"	15760 15766	1,000 800			117760 117766	4 / 50 4 / 50
	White Fin/Trim™						
T-10	#8 x 2" #8 x 2-1/2""			16828 16830	605 505	96060 96065	4 / 100 4 / 100
	 Pro-Paks need to be 2" bit included in Pro 						



APPLICATIONS:

- Trim Work
- Cabinets
- Fine Carpentry

RT COMPOSITE[™] EXTERIOR TRIM SCREW



The RT Composite[™] screw is a specially designed fastener for attaching composite and cellular PVC materials. Reverse threading under the head of the fastener helps the screw head disappear beneath the surface of the classic wood composite material while reducing or eliminating the dimple that is common in this substrate.

- Trim Head: Clean, finished look
- Underhead Reverse Thread: Reduces or eliminates mushrooming
- **Star Drive Recess:** Zero stripping, with 6 points of contact
- W-Cut[™]: Low torque, faster drive
- Zip-Tip[™]: Eliminates pre-drilling
- Climatek[™] Coating: ICC-ES AC257 code approved for use in treated lumber¹
- Available in Climatek or White Cimatek coated finish
- Some sizes also available in PHEINOX[™] 305 and 316 grade Stainless Steel• For interior / exterior use

1. For cedar, redwood, and other naturally-protected woods, GRK recommends PHEINOX™ stainless steel fasteners









	U.S (Std.) Size (Dia. x Length)	Bulk Part No.	Bulk Box Qty.	Pro-Pak Part No.	Pro-Pak Pail Qty.	Handy-Pak Part No.	Handy-Pak MC Qty./Screw Qty. (per EA)
0	#8 x 2" #8 x 2-1/2" #8 x 3-1/8"	15079 15083	3,500 2,500	16077 16079 16083	725 605 514	119077 119079 119083	6 / 100 6 / 100 6 / 100
	#9 x 2-1/2" #9 x 3-1/8"	15101 15105	2,900 1,900	16101 16105	408 348		
	White RT Compo	site™					
10	#8 x 2" #8 x 2-1/2" #8 x 2-3/4" #8 x 3-1/8"			16628 16630	605 505	17628 96075 17632 17634	20 / 100 4 / 100 20 / 100 10 / 100
	• Pro-Paks need to be • 2" bit included in Pr						



APPLICATIONS:

- Exterior Trim
- cPVC Deck Boards
- Hidden Fastening Systems

PHEINOX™ STAINLESS STEEL SCREWS

PHEINOX™ 305 CORROSION RESISTANCE FOR HIGH MOISTURE ENVIRONMENTS PHEINOX[™] 316 MARINE GRADE PROTECTION FOR SUPERIOR CORROSION RESISTANCE



GRK's PHEINOX™ line of stainless steel fasteners feature. designs from R4, RSS, Fin/Trim, and RT Composite screws in corrosion and stain resistant material.

GRK recommends PHEINOX[™] 305 stainless steels screws for applications that require superior corrosion resistance in exterior environments with high moisture content, such as docks, boardwalks, pools, and hot tubs. PHEINOX[™] 305 stainless is also recommended for use with cedar, redwood and various other wood species that have higher acid content. PHEINOX[™] 305 stainless steels screws are recommended for applications located more than 1 mile from the coast.

PHEINOX[™] 316 stainless steels screws are recommended for applications where extreme corrosion resistance is necessary, such as environments with high exposure to chlorides- such as de-icing salts- and in coastal applications within 1 mile of the coast. They are also suitable for use in chemically treated wood and naturally-protected wood such as cedar and redwood.

PHEINOX[™] 305 Stainless Steel

- For use in cedar, redwood, specialty hardwood, IPE, and Mangaris
- Corrosion resistance for wet environments
- Stain resistant in specialty wood

PHEINOX[™] 316 Stainless Steel 🚟

- For use within 1 mile of the coast
- Marine-Grade protection for superior corrosion resistance
- Superior Corrosion resistance for coastal environments
- Stain resistant in specialty wood

ICC

ESR-2442

ESR-3201



	U.S (Std.) Size (Dia. x Length)	Bulk Part No.	Bulk Box Qty.	Pro-Pak Part No.	Pro-Pak Pail Qty.	Handy-Pak Part No.	Handy-Pak MC Qty./Screw Qty. (per EA)
	R4™ Screws: PHE	INOX™ 305					
T-25	#10 x 2-1/2" #10 x 3-1/8"	25133 25137	2,500 1,500	61633 61637	240 210	61733 61737	4 / 80 4 / 70
	RSS [™] Screws: PH	EINOX™ 305	;				
T-30	5/16" x 3-1/8" 5/16" x 4" 5/16" x 5-1/8"	30221 30225	500 400			62225 132231	4 / 45 4 / 40
	5/16" x 6"	30235	300				
	RT COMPOSITE™	Trim Screw	s: PHEINOX	™ 305			
T-10	#8 x 2" #8 x 2-1/2″	35079	3,500	36077 36079	600 560	37079	20 / 100
T-15	#9 x 2-1/2"			36101	365		
	FIN / TRIM™ Scre	ws: PHEINO	X™ 305				
T-10	#8 x 1-1/2" #8 x 2" #8 x 2-1/2" #8 x 3-1/8"			61728 61730 36734	510 420 385	37724 67728 67730 37734	20 / 100 6 / 100 6 / 100 10 / 100
T-15	#9 x 2-1/2"			36752	365		
	R4™ Screws: PHE	INOX™ 316					
T-25	#10 x 2-1/2" #10 x 3-1/8"					137133 137147	4 / 80 4 / 70
	FIN / TRIM™ Scre	ws: PHEINO	X™ 316				
T-10	#8 x 2-1/2"					147730	6 / 100

• 2" bit included in Pro-Paks. 1" bit with Handy-Paks



APPLICATIONS:

- Boardwalks
- Pool Decks
- Spas

LOW PROFILE CABINETTM CABINET SCREWS

QUICK AND SECURE INSTALLATION

GRK's Cabinet screws are designed for use in cabinet construction and installation. Cabinet screws are manufactured in a #8 gauge (4 mm) diameter for universal size convenience.

- Star Drive Recess: Zero stripping, with 6 points of contact
- **Zip-Tip™:** Eliminates pre-drilling¹
- W-Cut[™]: Low torque, faster drive
- Washer Head: Creates a flush, clean hold for a strong and secure installation
- Climatek[™] Coating: ICC-ES AC257 code approved for use in treated lumber²
- White Cabinet Coating: Color matched for interior applications
- For interior / exterior³ use



- 1. Zip-Tip included on fasteners 1-1/4" and longer
- 2. For cedar, redwood, and other naturally-protected woods, GRK recommends PHEINOX™ stainless steel fasteners
- 3. White Cabinet Coating only suitable for interior use



	U.S (Std.) Size (Dia. x Length)	Bulk Part No.	Bulk Box Qty.	Pro-Pak Part No.	Pro-Pak Pail Qty.	Handy-Pak Part No.	Handy-Pak MC Qty./Screw Qty. (per EA)
	#8 x 1″					96050	6 / 100
	#8 x 1-1/4"	10069	4,000	100069	330	114069	6 / 100
	#8 x 1-1/2"	10073	3,000	100073	330	114073	6 / 100
	#8 x 1-3/4"	10075	2,000			12075	10 / 100
T-15	#8 x 2"	10077	2,000	96077	330	113077	4 / 100
	#8 x 2-1/2"	10079	1,500	110079	330	113079	4 / 100
	#8 x 2-3/4"					113081	4 / 100
	#8 x 3-1/8"	10083	1,000	110083	270	114083	6 / 50
	White Low Profil #8 x 1-1/4"	le™ Cabinet	Screws			120680	6 / 80
	#8 x 1-1/2"					120680	6 / 80
T-15	#8 x 2-1/2"					120670	6 / 80
	110 X 2 172					120000	0700
	 Pro-Paks need to b 2" bit included in P 		nultiples of tw	vo			



APPLICATIONS:

- Cabinet Construction & Installations
- Trim & Moulding
- Light-Duty Framing

TOP STAR™ ADJUSTABLE SHIM SCREWS



FOR PLUMB INSTALLATION OF WOODEN DOORS AND WINDOWS. NO MORE SHIMS!

GRK's adjustable Top Star[™] shim screw is a screw within a screw that allows you to install wooden doors or windows without the use of shims. The quick and easy system reduces labor and allows for hassle free adjustment to ensure plumb installation.


The 4-point top sleeve provides a secure hold into the frame, while the GRK Star Drive bit is used to make the adjustments needed for a perfect, shim-free installation.


The Top Star's highly-engineered system can be used for installation of wooden doors, windows, insulation, paneling, wall-units, and cabinets.


- **Recessed Star Drive:** Zero stripping, with 6 points of contact
- **4-point 3/8" Diameter Threaded Sleeve** provides a secure hold in your wooden frame
- **Micro-Adjustments** allow for an absolute plumb installation
- Use with GRK's Top Star™ Crown and T-15 Star Bit System
- Zinc Plated finish for lasting durability
- For Shim Free Installation of wooden doors, windows, insulations, paneling, built-in wall units, and cabinets




J.S (Std.) Size Dia. x Length)	Pro-Pak Part No.	Pro-Pak Pail Qty.					
3/8" x 2-1/2" 3/8" x 3-1/8"	20157 20161	100 100	Bit	Crown	Threaded Sleeve		
Pro-Paks need to be ordered in multiples of tw							
Crown / Bit			Blister-Pak Part No	. Blister-Pa	ık Qty.		
Includes: (1) Crov	vn / Bit with	each	86465		1		
5/16" drill bit not in	cluded						









The Bit drives the Top Star[™] into the material when the Crown and Bit are combined. Using the Bit without the Crown adjusts the distance.

The Threaded Sleeve moves independently from the Top Star[™] unless locked by the Crown. When locked, the Top Star[™] gets driven into the material.

Unlocked, the installed Top Star™is ready for leveling.



- Wooden Doors
- Windows
- Insulation

CALIBURN[™] CONCRETE SCREW



HEAVY DUTY CONCRETE AND MASONRY FASTENER

Caliburn[™] Concrete screws are professionally engineered fasteners with a patented thread design for ease of driving the screw into concrete and similar applications.

- **Star Drive Recess:** Zero stripping, with 6 points of contact
- Aggressive Heavy Duty Threads lock into concrete and can be removed/reinserted without screw damage
- Calibrun[™] XL: washer head design for superior holding power
- Climatek[™] Coating: ICC-ES AC257 code approved for use in treated lumber
- Ideal for use in anchoring to concrete or wood to concrete applications including basement framing and sheds

APPLICATIONS:

- Wood to Concrete Framing
- Electrical and Plumbing Fixtures
- Caliburn XL for Heavy Duty Concrete Anchoring





	U.S (Std.) Size (Dia. x Length)	Bulk Part No.	Bulk Box Qty.	Handy-Pak Part No.	MC Qty./Screw Qty. (per EA)
	Caliburn™ XL				
)	19/64" x 2-3/4" 19/64" x 3-1/2" 19/64" x 5"	55778	400	57774 57778 57785	10 / 25 10 / 25 10 / 25

• 1" bit included in Handy-Paks

T-40

MSS[™] METAL SIDING SCREW





This screw has an integrated washer-head and is complemented by a rubber washer below the screw head. This feature also helps protect the washer from prolonged exposure to the sun for long lasting, secure siding installations.

- White Color, Low Profile Head produces a clean, finished look which is preferred for moldings, closet organizers, and metal siding
- Washer Head increases holding power
- Rubber Washer: seals drill hole from the elements
- W-Cut[™] Thread Design tiny saw blades reduce torque by cutting through the material
- ZIP-TIP[™] for easy starts and no pre-drilling
- For use in interior or exterior applications including metal siding, garage door trim, and even closet organizers. Not for use with treated lumber

APPLICATIONS:

- Metal Siding
- Garage Door Trim
- Closet Organizers



• 1" bit included in Handy-Paks



Bit Size	Bit Color	Fits	Bulk Part No.	Bulk Box Qty.	Carded Part No.	Carded Qty/per pack
T-10 2" T-10 3"	Yellow Yellow	Trim™ Head #8	86419	25	187419 87421	2 2
T-15 2" T-15 3"	Red Red	R4™ Screw #6 & 8 Trim™ Head #9 Cabinet™ Screw	86427	25	187427 87429	2 2
T-20 2"	Purple		86435	25	187435	2
T-25 2" T-25 3"	Green Green	R4™ #9,10 &12 RSS™ #10 & 1/4" MSS™ #9	86443	25	187443 87445	2 2
T-30 2" T-30 3"	Black Black	RSS™ Structural Screw 5/16" Caliburn™ & Caliburn PH™	86451	25	187451 87453	2 2
T-40 2"	Blue	Caliburn XL™ Screws RSS™ Structural Screw 3/8"	86459	25	187459	2

Crown/Bit				
	TOP STAR™		86465	1



STAR DRIVE BITS & ACCESSORIES



Tapcon® is the #1 recognized screw anchor brand in the industry. For decades, Tapcon has helped professionals get their concrete anchoring jobs done right the first time, every time.

The blue, corrosion-resistant coating enables our anchors to withstand the harshest conditions, and their unmatched performance (30% less torque and 20% more holding power) in concrete, block and brick applications make them an excellent alternative to expansion anchors, plugs and lag shields.

For quality, strength, and ease of installation, nobody matches the confidence pros get from using the original true blue screw.





TAPCON® CONCRETE SCREW ANCHORS



NOTHING ANCHORS LIKE A TAPCON.

Tapcon concrete anchors deliver the ease of use, superior precision, and unparalleled performance that professionals demand.

- Eliminate bit slips and increase productivity with star recess on flat head Tapcon anchors
- **Resist head snaps** and spin outs with under-head ribs on hex head Tapcon anchors
- **Superior holding strength** for confidence in a job done right
- **Corrosion resistant**, long lasting performance with Climaseal[™] coating
- WERCS threadform allows for easy installation across a variety of masonry substrates
- ICC-ES recognized for use in concrete and masonry (ESR-2202 & ESR-1671)

APPLICATIONS:

Star Head

- Furring Strips
- Wood Framing
- Window Frames

Hex Head

• Electrical Boxes





U.S (Std.) Size (Dia. x Length)	Bucket Part No.	Bucket Qty.	Lg. Clam Part No.	Lg. Clam Qty.	Med. Pack Part No.	Med. Pack Qty.	Small Pack Part No.	Small Pack Qty.
STAR HEAD			-		•			<u></u>
3/16" x 1-1/4" 3/16" x 1-3/4" 3/16" x 2-1/4" 3/16" x 2-3/4" 3/16" x 3-1/4"	28550 28555 28560 28565	225 225 225 225	28350 28355 28360 28365 28307	75 75 75 75 75	28250 28255 28260 28265	25 25 25 25	28150 28155 28160 28165 28107	8 8 8 8 8
1/4" x 1-3/4" 1/4" x 2-1/4" 1/4" x 2-3/4" 1/4" x 3-3/4" 1/4" x 4"	28575 28585	225 150	28375 28380 28385 28395 28304	75 75 75 75 50	28275 28280 28285 28390 28397	25 25 25 25 25 25	28175 28180 28185 28295 28204	8 8 8 8 8
HEX HEAD								
3/16" x 1-1/4" 3/16" x 1-3/4" 3/16" x 2-3/4" 1/4" x 1-1/4" 1/4" x 1-3/4" 1/4" x 2-1/4" 1/4" x 2-3/4" 1/4" x 3-1/4" 1/4" x 3-3/4"	24515 24520 24525 24530 24501	225 225 225 150 150	24300 24305 24310 24315 24320 24325 24330 24301 24301 24340	75 75 75 75 75 75 75 75 75 75 75	24200 24205 24210 24215 24220 24225 24230 24335	25 25 25 25 25 25 25 25 25 25	24100 24105 24110 24115 24120 24125 24130 24101	8 8 8 8 8 8 8 8 8
1/4" x 4"			1010	, ,	24345	25		
WHITE ULTRASHI 3/16" x 1-3/4" 3/16" x 2-1/4" 3/16" x 2-3/4" 1/4" x 2-3/4" 1/4" x 3-1/4" 1/4" x 3-3/4"			28371 28372 28367 24388 24391 24392	75 75 75 75 75 75 75	28267 24288	25 25	28171 28172 28167 24188	8 8 8 8
410 STAINLESS ST	EEL TAPCO	N						
3/16" x 1-3/4" 3/16" x 2-3/4" 1/4" x 1-3/4" 1/4" x 2-3/4" MAXI-SET TAPCO	N						26155 26165 26120 26130	8 8 8 8
1/4" x 2-1/4" 1/4" x 2-1/4"			24326 24323	50 50				
TAPCON DRILL B	TS					1		
5/32" x 3-1/2" 5/32" x 4-1/2" 5/32" x 5-1/2" 3/16" x 3-1/2" 3/16" x 4-1/2"					11249	4	11256 11247 11363 11257 11248	1 1 1 1 1
3/16" x 5-1/2" 5/32" x 7" SDS 3/16" x 7" SDS 1/4" x 7" SDS 3/8" x 8" SDS 1/2" x 10" SDS					11250	4	11362 11492 11491 11493 11494 11495	1 1 1 1 1 1
TAPCON PRO INS	TALLATION	КІТ						
Tapcon Pro Install Tool							79013	1 F

AGE 49

TAPCON+® HEAVY DUTY CONCRETE SCREW ANCHORS



STRONGER. FASTER. EASIER.

Tapcon+ unmatched performance in concrete, block and brick applications make them an excellent alternative to expansion anchors, plugs, lag shields and have a blue corrosion resistant coating that enables them to withstand the harshest conditions. That's why when pros look for quality, strength and ease of installation, they choose Tapcon.

- ICC-ES Approved for use in uncracked & cracked concrete and seismic conditions (ESR-3699)
- Heavy-Duty Holding Power in all concrete conditions
- **Flexibility:** to install closer to the edge & closer together with confidence
- **Precision Fit:** A long-standing reputation for quality, strength, and ease of installation from industry professionals







U.S (Std.) Size (Dia. x Length)	Pro-Pak Part No.	Pro-Pak Qty.	Handy-Pak Part No.	Pro-Pak Pail Qty.	Small Pack Part No.	Small Pack Qty.
5/16" x 2-1/4"			24292	15	24192	4
5/16" x 3"			24293	15	24193	4
3/8" x 1-3/4"	11440	10			50440	2
3/8" x 2-1/4"	11441	10			50441	2
3/8" x 3"	11413	10			50403	2
3/8" x 4"	11414	10			50404	2
3/8" x 5"					50445	2
3/8" x 6"					50446	2
1/2" x 3"	11447	10			50447	2
1/2" x 4"	11420	10			50408	2
1/2" x 5"	11449	10			50449	2
1/2" x 6"	11421	10			50426	2



APPLICATIONS:

- Sill Plates
- Post Cap Connector
- Ledger Board
- Heavy Equipment
- Industrial Racking/Shelving
- Modular Walls
- Machinery

Trubolt WEDGE ANCHORS HEAVY DUTY CONCRETE ANCHORS



MAXIMUM STRENGTH FOR HEAVY-DUTY CONCRETE ANCHORING

Trubolt Wedge Anchors offer maximum strength and ultimate flexibility making them the PRO choice for heavy-duty anchoring. This wedge anchor features a high-strength body that is built to resist tension and shear loads.

- ICC-ES Approved for use in uncracked concrete (ICC-ES-ESR-2251)
- Heavy-Duty Holding Power in concrete conditions
- Fully Threaded Anchor Design for application versatility
- Stainless Steel Clip provides extra corrosion protection
- A long standing reputation for quality, strength, and ease of installation from industry professionals





U.S (Std.) Size (Dia. x Length)	Pro-Pak Part No.	Pro-Pak Qty.	Handy-Pak Part No.	Handy-Pak Pail Qty.	Poly-Bag Part No.	Poly-Bag Qty.
1/4" x 2-1/4"			12377	25	50080	1
3/8" x 2-1/4"	12367	50	12015	15	50081	1
3/8" x 3"	03014	50			50082	1
3/8" x 3-3/4"	12370	50	12016	15	50083	1
3/8" x 5"			12022	15	50084	1
1/2" x 2-3/4"					50085	1
1/2" x 3-3/4"	12371	25	12017	10	50181	1
1/2" x 4-1/4"	12372	25	12020	10	50086	1
1/2" x 5-1/2"	12373	25	12019	10	50087	1
1/2" x 7"					50088	1
5/8" x 5"	12310	10			50089	1
5/8" x 6"	03041	10				
5/8" x 7"	03044	10			51030	1
5/8" x 8-1/2"					50305	1
3/4" x 5-1/2"	02992	10			51001	1
HOT-DIPPED GAL	VANIZED					
1/2" x 5-1/2"HDG			12021	10	50303	1
1/2" x 7" HDG	12029	10			50307	1



APPLICATIONS:

- Machinery
- Sill plate installation

RED HEAD® CONCRETE ANCHORS CONCRETE ANCHORS



VERSATILE ANCHORING SOLUTIONS FOR CONCRETE & BUILDING

Red Head can help you get any job done right, from heavy-duty ceiling applications to light-duty work in block and brick.

Our sleeve anchor is our most versatile anchor with the ability to fasten in block, brick, masonry, and solid concrete.

For a lighter duty project, Poly-Set and Hammer-Set are great choices for block, brick and concrete and allow for a quick and easy installation. For heavy-duty overhead applications, use our Drop-In anchors. Use the complete family of anchors and SDS bits to ensure precise hole depth and diameter when using our anchors.



ţ

HAMMER-SET

DROP-IN



U.S (Std.) Size (Dia. x Length)	Pro-Pak Part No.	Pro-Pak Qty.	Handy-Pak Part No.	Handy-Pak Pail Qty.	Poly-Bag Part No.	Poly-Bag Qty.
SLEEVE ANCHORS						
1/4" x 2-1/4" Acorn Hd					50122	1
1/4" x 2-1/4" Threshold Hd					50123	1
1/4" x 3-1/8" Flat Hd					50121	1
5/16" x 1-1/2" Hex Hd					50112	1
5/16" x 2-1/2" Hex Hd					50113	1
3/8" x 1-7/8" Hex Hd					50114	1
3/8" x 3" Hex Hd	11281	50	11013	15	50115	1
1/2" x 2-1/4" Hex Hd					50116	1
1/2" x 3" Hex Hd	11283	25	11014	10	50117	1
1/2" x 4" Hex Hd	11285	25	11018	10	50118	1
5/8" x 4-1/4" Hex Hd					50119	1
5/8" x 6" Hex Hd					50120	1
POLY-SET ANCHORS						
1-1/4″			35220	50		
1-7/16″			35225	50		
HAMMER-SET ANCHORS						
1/4" x 1"	35300	75	35200	25		
1/4" x 1-1/2"	35303	50	35203	15		
1/4" x 2"	35305	50	35205	15		
1/4" x 3"	35207	25				
DROP-IN ANCHORS						
3/8" Anchor	01891	50			50125	1
1/2" Anchor					50126	1
3/8" Setting Tool					07499	1
1/2" Setting Tool					07501	1



APPLICATIONS:

- Conduit Clips
- Drywall tracks
- Curtain rods
- Shelving
- Shelf Ledgers
- Racking
- Secure Transformers
- Light Fixtures

A7+ ADHESIVE ANCHORS HIGH STRENGTH ADHESIVE ANCHORING SOLUTION





For jobs requiring versatility, high performance, and efficiency, Red Head's A7+ Concrete Adhesive Anchor is the one anchoring solution that does it all. A7+ takes only 45 minutes to fully cure and can be used in challenging conditions like cold temperatures and water-filled holes. A7+ is also ICC-ES approved for cracked concrete and seismic building code requirements.

- **ICC-ES approved** For use in cracked concrete and seismic conditions (ICC-ES-ESR-3903)
- Quick 45 minute cure time for fast installation
- **Easy dispensing** with a standard caulk gun, eliminating the need for any special tools
- Increased productivity with a successful cure in saturation concrete and water-filled holes
- A long-standing reputation for quality, strength, and ease of installation from industry professionals.





ESR-3903





A7+ can also be used in any standard mediumduty caulk gun, eliminating the inconvenience of needing a special dispensing tool. Combine the simplicity of dispensing with the quick-curing product, and installation is fast, easy, and doesn't take time away from the rest of the project. The A7+ concrete adhesive anchoring solution is a high-performing anchor that rivals other products on the market in both price and features. This high performance and efficiency allows for less time on the job and more productivity.

Providing code approved performance and a fast 45 minute cure time, Red Head A7+ is the concrete anchoring adhesive that delivers.

U.S (Std.) Size (Dia. x Length)	Part No.	Qty.
9.5 oz. Cartridge	07111	1



APPLICATIONS:

For use in:

- Concrete
- Grout-filled and hollow brick
- Clay tile

RAMSET® TOOLS AND FASTENERS POWDER ACTUATED TOOLS FOR RESIDENTIAL AND COMMERCIAL REMODELING



DURABLE. STURDY. POWERFUL.

From concrete to steel, Ramset has the tool to help

you get the job done on time. Ramset is designed with speed and productivity in mind. With innovating solutions we provide you with the best anchoring experience.

- Powder actuated tools for concrete or steel
- **Drives job sit speed** through quick and efficient fastening
- Market leading tool innovations help you get the job done right
- The Powder Actuated Tool choice for PROs

ltem/Tool	Part No.	Qty.
Cobra+ .27 Caliber Semi-Automatic Powder Actuated Tool	16942	1
MasterShot .22 Caliber Single-Shot Powder Actuated Tool	40088	1
TriggerShot .22 Caliber Single-Shot Powder Actuated Tool	40066	1
HammerShot .22 Caliber Single-Shot Powder Actuated Tool	00022	1



пстг



			o-Pak rt No.	Pro-Pa Qty.	ak	Handy-Pak Part No.	Handy Pail Qt	·Pak y.
DRIVE PI	DRIVE PINS							
.300 x 1/2" .300 x 3/4" .300 x 1" .300 x 1-1/2" .300 x 2" .300 x 2-1/2" .300 x 3"			06171 00747 00759 00774 00780 00786 00794		100 100 100 100 100 100 100	00787	00787	
DRIVE PI	NS WITH WA	SHERS						
.300 x 1" .300 x 1-1/2" .300 x 1-1/4" .300 x 2" .300 x 2-1/2" .300 x 3"			00797 00803 00800 00806 00809 07886		100 100 100 100 100 100	00804 00810 07887		25 15 15
RAMGUARD DRIVE PINS FOR			E IN TREATED L	UMBER			_	
.300 x 2-1/2" .300 x 2-1/2" with Washers .300 x 3" with Washers			09167 09173 09176		100 100 100			
Caliber	Color	Туре	Strip Load Part No.	Qty.	Single Shot Box Pt. #	Single Shot Box Qty.	Single Shot Blister pt.#	Single Shot Blister Qty.
.22 .22 .22 .27 .27 .27	Brown Green Yellow Green Yellow Red	Powder Powder Powder Strip Strip Strip	00652 00667 00682	100 100 100	00594 00601 00607	100 100 100	50077	25



APPLICATIONS:

- 2 x 4 framing
- Furring strips
- Attaching electrical boxes

TEKS® METAL FASTENERS METAL TO METAL SCREWS AND WOOD TO METAL SCREWS



SECURELY FASTEN METAL WITH SPEED

Teks® fasteners are offered in sharp and drill points

that easily penetrate light to heavy gauge metal and wood. Professionals no longer have to struggle when engaging their work surface.

Teks® fasteners are offered in a wide variety of head styles to meet professionals installation needs. No tool slippage or cam-outs even with old sockets and worn bits. Professionals can drill, tap, and fasten – all in one motion.

- **Drive surface and recess:** Reduces cam-outs to prevent slipping during installation
- **Drill Points:** Self-drills through light to heavy gauge metal with ease
- **Sharp Points:** Self-pierces into light gauge metal to start drilling faster
- **Self-Tapping Threads:** Taps their own threads to provide less effort when fastening into metal
- **Corrosion Resistant Finish:** Protects the job's appearance with long lasting coating
- **Reamer Wings:** Winged screws self-drill into wood and engage metal to provide a secure hold

APPLICATIONS



WOOD TO METAL:

- Attaching roof/subfloor decking
- Trailer beds to frame
- Wood headers to steel frame



METAL TO METAL:

- Attaching HVAC
- Electrical
- Metal framing
- General metal to metal applications

U.S (Std.) Size	Pro-Pak	Pro-Pak	Handy-Pak Part No.	Handy-Pak			
(Dia. x Length)	Part No.	Pail Qty.	Part No.	Ctn. Śize/Qty.			
TEKS® METAL TO METAL SCREWS							
HEX WASHER HEAD / DRILL POINT (METAL TO METAL)							
8 x 1/2"			21308	S/280			
8 x 3/4"			21312	S/180			
8 x 1″			21316	S/170			
10 x 5/8"			21396	S/170			
10 x 3/4"	21322	450	21320	S/150			
10 x 1"			21328	M/140			
10 x 1-1/2"			21332	M/90			
12 x 3/4"			21336	M/120			
12 x 1"	21341	400	21340	M/100			
12 x 1-1/2"			21344	M/80			
12 x 2"			21348	M/60			
12/14 x 2"			21820	M/60			
14 x 3/4"			21349	S/100			
14 x 1"			21351	S/60			
14 x 1-1/2" 14 x 2-1/2"	21358	120	21352 21356	M/50 M/30			
		120	21356	101730			
HEX WASHER HEAD / SHAR	RP POINT (METAL TO META	L)					
6 x 1/2"			21301	S/320			
8 x 1-1/2"			21318	M/85			
10 x 3/4"			21327	M/150			
PAN HEAD / DRILL POINT ((METAL TO METAL)						
8 x 1/2″			21360	S/300			
8 x 3/4"			21364	S/240			
10 x 3/4"			21372	S/170			
PAN HEAD / SHARP POINT	(METAL TO METAL)						
6 x 1/2"			21359	S/300			
PANCAKE HEAD / DRILL POINT (METAL TO METAL)							
10 x 5/8"			21376	S/190			
TEKS® WOOD TO METAL SCREWS							
PHILLIPS FLAT HEAD / DRI	LL POINT W/REAMER WING	S (WOOD TO METAL)					
1/4-20 x 3"			21378	M/40			
10 x 1-7/16"	21381	300	21380	S/100			
12 x 2-3/4″	21386	200	21384	S/40			



TEKS® METAL FASTENERS ROOFING SCREWS AND LATH SCREWS




Teks Roofing Screws provide secure fastening with strong holding power, without the need to pre-drill.

- Self-sealing neoprene washer provides a waterproof seal
- Premium finish provides exceptional corrosion resistance in harsh outdoor environments

Teks Lath Screws provide secure metal-to-metal and metal-to-wood fastening with strong holding power, without the need to pre-drill.

- Lath head: Lath Screws feature a low-profile head for a semi-flush finish for virtually any application
- · Self-tapping threads ensure strong holding power
- Zinc plated finish protects the job's appearance. resistance in harsh outdoor environments

APPLICATIONS



ROOFING SCREWS:

- Ideal for attaching roofing
- Wall panels
- Steel and wood framing.



LATH SCREWS:

- Attaching lath to wood or steel studs for stucco/ plaster applications
- Attaching pre-drilled metal brackets to post-framing
- Any general applications requiring a wide, low-profile head



U.S (Std.) Size (Dia. x Length)	Pro-Pak Part No.	Pro-Pak Pail Qty.	Handy-Pak Part No.	Handy-Pak Ctn. Size/Qty.			
TEKS® ROOFING SCREWS							
EX WASHER HEAD / SHARP POIN	IT (METAL TO WOOD)						
9 x 1″	21401	360	21400	M/120			
9 x 1-1/2"	21406	400	21404	M/100			
HEX WASHER HEAD / DRILL POIL	NT (METAL TO METAL)						
12 x 3/4"			21408	M/90			
12 x 1″	21418	400	21412	M/80			
12 x 1-1/2"	21422	300					
TEKS® LATH SCREWS							
MODIFIED TRUSS HEAD / SHARP	POINT (METAL TO ME	TAL)					
8 x 1/2"			21500	S/260			
8 x 3/4"	21506	600	21504	S/200			
8 x 1"	21510	510	21508	S/170			
8 x 1-1/4"			21512	M/140			
8 x 1-5/8"			21516	M/120			
8 x 2" 8 x 2-1/2"			21518 21519	M/100 M/80			
			21519	11/100			
MODIFIED TRUSS HEAD / DRILL POINT (METAL TO METAL)							
8 x 1/2"			21520	S/260			
8 x 3/4"	21525	600	21524	S/200			
8 x 1" 8 x 1-1/4"	21530	510	21528 21532	S/170 M/140			
8 x 1-5/8"			21532	M/140 M/120			
8 x 2"			21538	M/100			
8 x 2-1/2"			21540	M/80			

BACKER-ON[®], ROCK-ON[®] CEMENT BOARD SCREWS



CEMENT BOARDS FASTENED RIGHT

Backer-On[®] cement screws are designed for attaching HardieBacker[®] cement board and Rock-On[®] cement board screws are designed for attaching Durock[®] cement board to wood or light gauge steel studs. The patented serrated head design countersinks for a flush finish even at angle, providing a smooth surface for tile installation. The T-25 Star Drive recess provides Stikfit[™] for onehanded installation. Climacoat corrosion resistant finish prevents rust from bleeding into grout. Making it perfect for use in high moisture areas such as bathrooms and kitchens.

Backer-On[®] and Rock-On[®] cement board screws comply with ANSI standards for cement board installation as specified by cement board manufacturers. Cement board manufacturers require ANSI compliance in order to remain eligible for warranty.


- **Serrated Head:** Designed to drive flush even at an angle
- Star Drive with T-25 Bit: Provides Stikfit[™] for easy one-handed installation and eliminates cam-outs
- **Hi-Lo / Single Threads:** Starts quickly and drives smooth in cement boards
- **Sharp Points:** Offers immediate pick-up and eliminates the need to pre-drill
- **Climacoat Finish:** Corrosion resistant for preventing rust from bleeding into tile

BACKER-ON ROCK-ON

U.S (Std.) Size (Dia. x Length)	Pro-Pak Pro-Pak Part No. Pail Qty.		Handy-Pak Part No.	Handy-Pak Ctn. Size/Qty.		
BACKER-ON® SCREWS						
#9 x 1-1/4" #9 x 1-5/8" #9 x 2-1/4"	23406 23416	750 575	23401 23411 23421	M/185 M/140 M/100		
ROCK-ON [®] SCREWS						
#9 x 1-1/4" #9 x 1-5/8" #9 x 2-1/4"	23306 23316	750 575	23301 23311 23321	M/185 M/140 M/100		

BACKER-ON®/ ROCK-ON® StikFit Bit					
Size Point Part No. Carded Quantity / Per Pack					
#T-25 2"	24000	(2) StikFit Bits			

The T-25 StikFit Bits modified tip eliminates wobble and offers one-handed installation only for Backer-On/ Rock-On cement board screws. The bits are made with S2 modified steel for long lasting bit life.

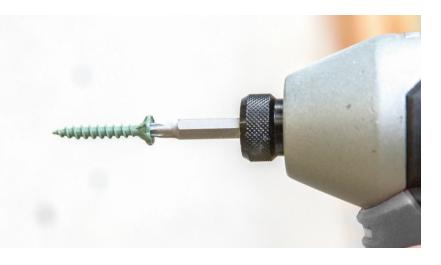

APPLICATIONS:

- Attaching fiber cement board to wood or light gauge steel framing
- Attaching fiberglass reinforced cement board to wood or light gauge steel framing

Pro Tip: Standard roofing nails, dry wall screws, and other alternatives to cement board screws are typically not specified by cement board manufacturers and not ANSI compliant.

E-Z ANCOR® DRYWALL ANCORS



E-Z Ancor® Twist-N-Lock



E-Z Ancor® Stud Solver



E-Z Ancor® Toggle Lock

EASY TO INSTALL WITH STRONG HOLDING POWER

E-Z Ancors® are ideal for hanging accessories, signs, fixtures, and shelving units on drywall. Designed to self-drill flush into drywall for easy and fast installations. No pre-drilling necessary. The threads are formed to provide increased stability and a secure hold.

E-Z Ancor® Twist-N-Lock is designed for light to medium-duty applications. The audible click provides confirmation of the anchor being firmly set. Threads cut deeply to resist pull-out and provide a secure hold.

E-Z Ancor® Stud Solver is designed for light to medium-duty applications. Installs anywhere on a wall, even if you hit a wood stud behind the drywall. Threads cut deeply to resist pull-out and provide a secure hold.

E-Z Ancor® Toggle Lock is designed for heavy-duty drywall applications. The superior 1-piece assembly prevents losing extra pieces behind the wall. The toggle bar swivels easily during assembly to provide a secure hold.

Buildex® Stucco Anchor is designed for light to medium-duty applications in stucco. The zinc plating is designed to be durable in exterior and interior applications. Kits include a drill bit for installation.

- **No Pre-Drilling:** Screws directly into drywall with a Phillips screwdriver
- **Self-Piercing Point:** Positions anchor in desired location without slipping and starts self-drilling faster
- Clean Finish: Installs flush into drywall
- **Strong Holding Power:** Prevents loose connections and items from wobbling



U.S (Std.) Size (Max Load)	Lg. Pack Part No.	Lg. Pack Qty.	Med. Pack Part No.	Med Pack Qty.	Small Pack Part No.	Small Pack Qty.	
E-Z ANCOR TWIST-N-LOCK	ANCHORS						
50 lbs. 75 lbs.	25350 25310	50 50	25200 25210	25 20	11353 11364	6 4	
E-Z ANCOR STUD SOLVER A	E-Z ANCOR STUD SOLVER ANCHORS						
40 lbs. 50 lbs.	25325 25316	50 50	25225 25216	25 20	25125 29503	4 5	
E-Z ANCOR / E-Z TOGGLE LOCK ANCHOR							
100 lbs.	25320	25	25220	10	10006	2	
BUILDEX [®] STUCCO ANCHORS							
3/16"x 1-1/2"Hex Hd 3/16"x 1-1/2"Flat Hd 1/4"x 2-7/8"			31810 31820 31840	25 25 25	31710 31720 31740	4 4 4	

E-Z ANCOR CONTRACTOR PACKS							
U.S (Std.) Size (Max Load)	Contractor Pack Qty.						
E-Z ANCOR CONTRACTOR TWIST-N-LOCK ANCHORS							
75 lbs. 25410		100					
E-Z ANCOR CONTRACTOR STUD SOLVER ANCHORS							
50 lbs.	100						
E-Z ANCOR TWIST-N-LOCK AND STUD SOLVER ANCHORS COMBO							
50 lbs./75 lbs.	./75 lbs. 25600						

Warning: Do not use Twist-N-Lock or Stud Solver anchors for ceiling applications. Do not use for mounting televisions. Load ratings are for items hung flush to the wall. Load ratings decrease when hanging items that project from the wall.



APPLICATIONS:

For Mounting:

- Picture Frames
- Shelving
- Mounting Brackets
- Hooks
- And more



LIABILITY AND WARRANTIES

GRK Fasteners[™] ("GRK") is a distributor of commercial-grade fasteners. The parts that we supply are quality inspected by independent labs.

We maintain lot traceability on all products listed in this catalog as long as they are in their original bulk boxes. Certifications are maintained on all fasteners.

Hydrogen Embrittlement: GRK takes measures during production of all fasteners to mitigate hydrogen embrittlement, including post-coating baking. These processes, however, do not guarantee that hydrogen embrittlement will not still be present or that it will not occur at a later date while in service. Specialized testing or a substitute part may be required, depending on the application.

GRK Warranty: GRK warrants to the first retail purchaser that its Climatek[™] coated, Deck Elite coated, and PHEINOX[™] stainless steel screws will not rust under normal environmental conditions when used in accordance with the recommendations listed in this catalog. This warranty is not transferable. Visit www.grkfasteners.com for more information.

LIABILITY AND WARRANTIES


Mechanical Fastening Warranty: (Includes GRK Fasteners, Tapcon, Red Head, Ramset, Teks, Rock-On, Backer-On, and E-Z Ancor). ITW Brands warrants that these products are free from defects in material and workmanship. ITW Brands's sole liability for any breach of this warranty shall be to replace this product or refund the purchase price.

Liability: Claims against GRK or ITW Brands shall be limited to a refund or credit for the price billed or paid for faulty or incorrect merchandise. Seller shall not be responsible for buyer's manufacturing costs, labor, alternate purchases, extra freight, replating, plating, lost profit, good will, recall costs, or other incidental or consequential damages.

Refunds/Replacements: In order to request a refund or replacement, please contact ITW Customer Service at BrandsCS@itwbrands.com or 877 489-2726 to start the process.

THERE ARE NO UNDERSTANDINGS, AGREEMENTS, REPRESENTATIONS, OR ADDITIONAL WARRANTIES, EXPRESSED OR IMPLIED (INCLUDING ANY REGARDING WARRANTIES OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE), NOT SPECIFIED HEREIN, RESPECTING ANY SALE OF PRODUCTS BY GRK FASTENERS™ (TO THE EXTENT PERMITTED BY LAW).







grkfasteners.com



tapcon.com



backeronrockon.com



ramset.com



teksscrews.com



redheadanchoring.com



easyanchors.com

FULL-LINE CATALOG



Part #99915 August 2022